



Point of Use
Water Coolers

AP-3 Range of Filters

The challenge

Provide the best possible quality water to enhance your brand, protect your machine and increase your profits.

The solution

3M Filtration filter systems provide ease of use and market leading protection for both your product and machine.

Features


- Sanitary Quick Change cartridge
- High flow, high capacity
- Built in valve-in-head
- Proprietary graded carbon block
- A choice of different media
- FDA compliant materials
- Integral mounting bracket on head
- Empty cartridge available

Benefits

- For clean and easy change-out
- Meets requirements of high flow machines
- Cartridge change-out without shutting off the water supply
- No activation or extended flush for ease of installation
- To:
 - Reduce chlorine taste and odour
 - Reduce sediment down to 1.0, 0.5 or 0.2 micron
 - Inhibit scale formation in hot water applications
 - Reduce 99.95% of Protozoan cysts – Cryptosporidium and Giardia
 - Remove >99.99% of bacteria
- Can be used in food and beverage applications
- For easy installation
- Enables simple sanitisation procedure



Point of Use Water Coolers

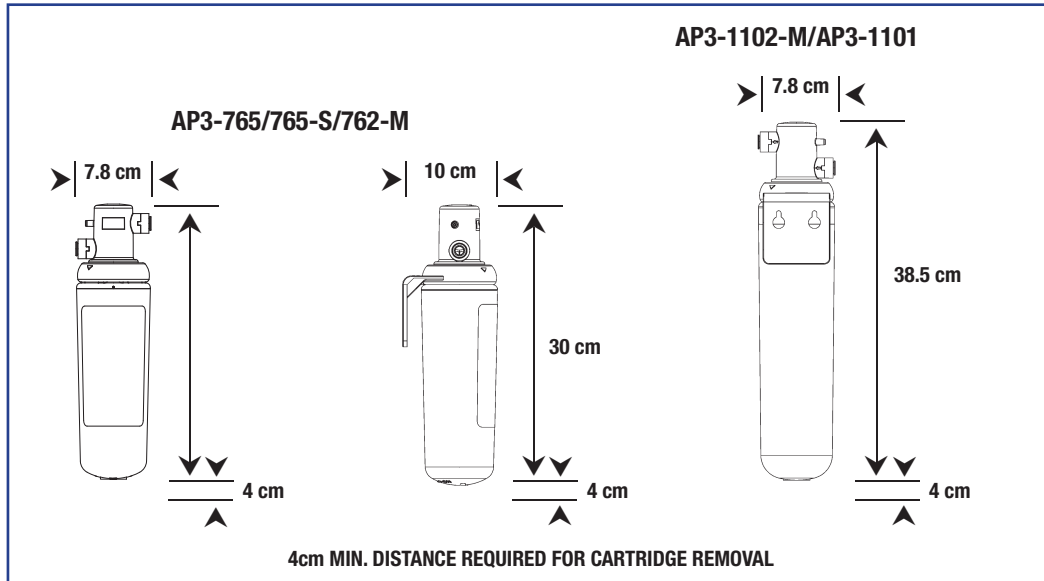

AP3 Model Range & Technical Specification

Model / system system	Part No.	Replacement cartridge	Part No.	Reduction Claims						Capacity (litres)	Flow Rate (lpm)	Temp (°C)	Micron Rating
				Chlorine Taste and odour	Sediment Reduction	Cyst Reduction	Scale Inhibition	Sanitisation	Bacteria Removal*				
AP3-765	70020019462	AP3-C765	70020019827	•	•	•				7,600	2.8	4.4-38	0.5
AP3-765-S	70020019470	AP3-C765-S	70020019835	•	•	•	•			7,600	2.8	4.4-38	0.5
AP3-762-M	70020020668	AP3-C762-M	70020020643	•	•	•			•	7,600	2.8	4.4-38	0.2
AP3-1102-M	70020020676	AP3-C1102-M	70020020650	•	•	•			•	11,000	3.8	4.4-38	0.2
AP3-1101	70020020684	AP3-C1101	70020115690	•	•					11,000	3.8	4.4-38	1
		AP3-E	70020019843						•				

* Removes >99.9999999% (log 8) of bacteria and cyst

Note: 3/8" Push Fit Fittings Included

For the filtration of cold water only. This product is for commercial use only. All materials are FDA compliant with CFR title 21. This is a mechanical, chemical filter. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment No. 070595-CT-001. In line with current good practice and EPDWA guidelines, filter cartridges should be changed every 6 months.

3M Water Filtration AP3 range of products are tested in accordance with NSF/ANSI Standard 42 for Particulate Reduction and Chlorine Taste and Odour and, where stated, NSF/ANSI Standard 53 for Cyst & Turbidity Reduction.

Maximum Operating Temperature is: 38°C
 Maximum Operating Pressure is: 125 psi



Water Filtration 3M United Kingdom PLC

3M Centre,
 Cain Road, Bracknell
 Berkshire RG12 8HT
 Tel: +44 (0) 1344 858000
 Fax: +44 (0) 1344 858559
www.3m.com/waterfiltration

3M Ireland

3M House, Adelphi Centre
 Upper Georges Street
 Dun Laoghaire
 Co. Dublin, Ireland
 Tel: +353 1 280 3555
 Fax: +353 1 280 3509

For more contact addresses visit our website www.cuno.com/international or www.3m.eu/filtration.

Data may be subject to change without further notice.

Please recycle.
 © 3M 2008. All rights reserved.

LITFSEUR0026 - 0508