BWT best protect


Filter system for water optimisation



Water with the protection factor for catering and vending

With BWT bestprotect, you can optimise raw water for catering applications in a targeted way. This filter system ensures balanced mineralisation and a consistently high pH value in the filtrate – key factors that minimise the risk of corrosion. Hardness-forming calcium ions are practically entirely removed and deposits of limescale and gypsum prevented in the case of raw water containing carbonates or sulphates. Insoluble or difficult-to-remove deposits in machines are now a thing of the past.

The filter system consists of a filter cartridge with a BWT besthead filter head (see graphic). Check valves in the filter head prevent water backflow and uncontrolled water discharge. BWT bestprotect food-safe filter systems are pressure-resistant and safe. They can be used worldwide in any drinking water system.

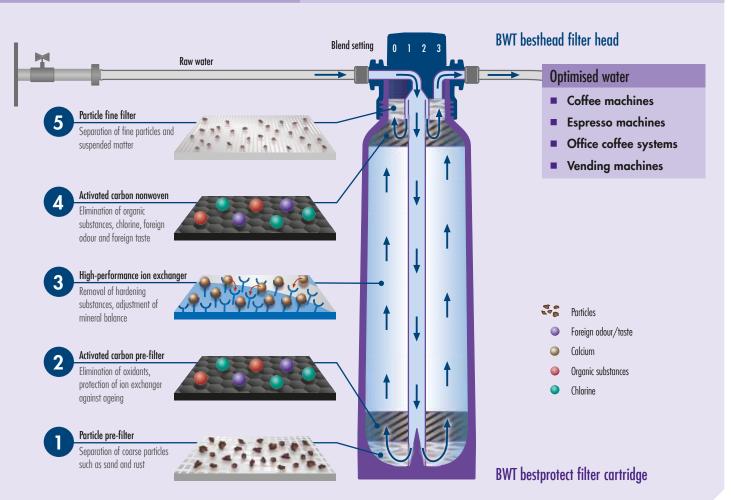



Technical data

| BWT bestprotect | Size | | | |
|---------------------------------|------------|------------|------------|------------|
| BW I besipioleci | S | V | XL | 2XL |
| Height without handle (A) in mm | 360 | 420 | 500 | 574 |
| Height with handle (B) in mm | 385 | 445 | 530 | 600 |
| Connection height (C) in mm | 310 | 370 | 450 | 520 |
| Ø filter cartridge (D) in mm | 88 | 115 | 145 | 185 |
| Weight in kg, (dry/wet) | 0.9/1.5 | 3.0/3.2 | 4.0/6.0 | 8.0/11.0 |
| Order no. for filter cartridge | FS22N00A00 | FS23N00A00 | FS28N00A00 | FS30N00A00 |

Settings and capacities

| | • | | | | | |
|------------------------------|---------------------------------------|-------|--|-------|-------|-------|
| <u>ر</u> ح | Total hardness in °dTH ⁽²⁾ | Blend | Filter capacity ⁽¹⁾ in litres S V XL 2XL | | | |
| | uni. | | 3 | v | ΛL | ZAL |
| | ≤7 | 0 | ≥855 | ≥2140 | ≥5125 | ≥8570 |
| io Fio | 8 | 0 | 750 | 1875 | 4458 | 7500 |
| preparation generation | 10 | 0 | 600 | 1500 | 3590 | 6000 |
| enel | 12 | 0 | 505 | 1250 | 2620 | 5000 |
| ge E | 14 | 0 | 440 | 1070 | 2245 | 4285 |
| /era | 17 | 0 | 380 | 880 | 1850 | 3525 |
| a. Fe | 20 | 0 | 310 | 750 | 1570 | 3000 |
| Hot beverage with steam g | 25 | 0 | 240 | 680 | 1175 | 2400 |
| | ≥27 | 0 | ≥225 | ≤650 | ≤1090 | ≤2220 |

Connection: 3/8" x 3/8" Horizontal or vertical installation

Operating conditions

Input pressure: 2–8 bar Water temperature: 4–30 $^{\circ}$ C Ambient temperature: 4–40 $^{\circ}$ C



Accessories

| | Connection | Length | Order number |
|--|-------------|---------|--------------|
| BWT besthead universal filter head | 3/8" x 3/8" | _ | FS00Y00A00 |
| BWT bestflush ventilation and flushing valve | 3/8" x 3/8" | _ | FS00Y51A00 |
| Connection hose | 3/8" x 3/8" | 1500 mm | FS00Y01F00 |
| Connection hose | 3/8" x 3/4" | 1500 mm | FS00Y02F00 |
| BWT test kit for hot beverages | - | - | YS00Y01A00 |



Product solutions from BWT water+more

Our products are unique filtration solutions for water optimisation in the catering industry:

- BWT bestmax the all-rounder
- BWT bestprotect the protector
- BWT bestmax PREMIUM the taste expert
- BWT bestmax BALANCE the natural one

With these products from BWT water+more, you can optimise any water, in any location, for any catering application in a targeted way. Use the experience and technologies of BWT water+more to supply your business and your processes with the best possible water efficiently. Find out more at www.bwt-wam.com.



Manufacturer:

BWT water + more GmbH Walter-Simmer-Str. 4 · A-5310 Mondsee Telefon +43 6232 5011-1164 office@bwt.at · info@bwt-filter.com Sales:

BWT water+more Deutschland: info@water-and-more.de · Tel.: +49 611 58019-0
BWT water + more Austria: kundenservice.wm@bwt-group.com · Tel.: +43 6232 5011-1164
BWT Aqua AG Schweiz: info@bwt-aqua.ch · Tel.: +41 61 755 88 99

www.bwt-wam.com

BWT UK Ltd: WaterandMore@bwt-uk.co.uk · Tel.: +44 1494 838128



⁽¹⁾ Capacities may deviate by up to ± 5 % depending on the local water quality and volume flow. (2) °dTH = Total hardness. Subject to change.