




### The only solution specifically designed for pumping waste water from island-based combination ovens.

The WaterCare CombiPump series has been designed and developed by our own research and development team at the request of a leading combination oven manufacturer specifically requiring wastewater from their oven to be pumped away at a height of just 40MM from the floor.

Where floor gully drainage is absent or where ovens are sited away from the drainage points of the kitchen such as islands. The new improved CombiPump range has a capacity to pump away up to 160 l/pm which not only means it can now be connected to 2\* ovens but also gives it the versatility to be used in various other circumstances where drain water is required to be removed and no immediate drainage is available.

\*CombiPump4 is suitable to be used on 2x 10 Grid Combination Ovens or 1x 20 Grid Combination Oven.

\*\*The CombiPump7 suitable up to 2x 10 Grid Combination Ovens.

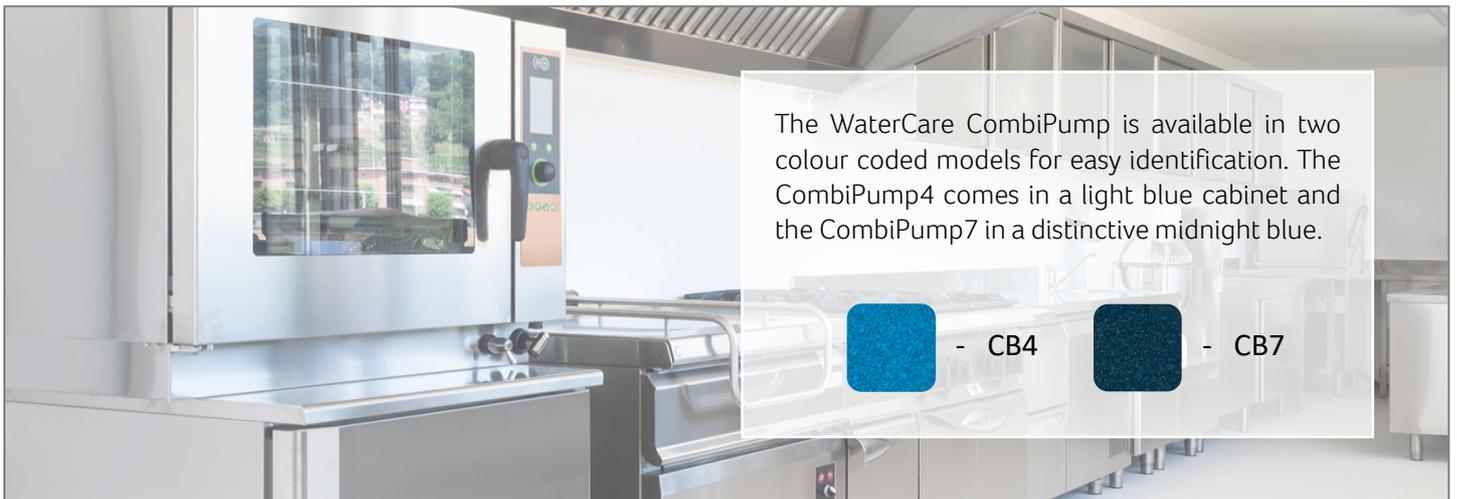

The WaterCare CombiPump is available in two colour coded models for easy identification. The CombiPump4 comes in a light blue cabinet and the CombiPump7 in a distinctive midnight blue.



- CB4



- CB7

### CombiPump Selection & Application

The CB4 is designed to be used on ovens where the waste outlet from the oven is as low as 40mm from floor level and requires the pump to activate at that level in order to prevent backflow into the oven.

The CB7 allows for a waste outlet up to 70mm with the pump activating at this higher level.

Please call us on 01279 780250 to discuss your waste water requirements.



**SPECIFICATIONS OVERLEAF**

## Specifications

<b>Pump</b>	Pump duty	Continuously rated
	Maximum temperature	96°C
	Operating temperature	85°C
<b>Electrical</b>	Phase	Single 239 Volts 50HZ
	Current	2.45 Amps FLC
	Motor output	0.4kW
<b>Flow and Pressure</b>	Pump speed	2800 RPM
	Maximum input flow	80 Litres per minute
	Output flows	160 Litre per minute @ 9M head
<b>Control</b>	BMS high water	Available on request
	Method	Float switch
<b>Cabinet</b>	Outer casing	M.D.P.E.
	Capacity	15 Litres
	CB4 & CB7 Dimensions (mm)	H: 470 x W: 250 x D: 450
	Inlet water connection (Recommended)	1 ½" connection (deflector and connector supplied)
	Outlet water connection	¾" BSP PVC

Having an operational ability to pump away to a 9 metre head at up to 160 litres per minute and to withstand water temperatures up to 96 degrees centigrade together with a choice of capacities to suit any size oven means the CombiPump series is the ideal alternative to expensive alterations of existing drainage systems.

\*Figures are approximate and for indication only, volumes may vary dependant on water temperature and contaminants.

## Part Descriptions & Codes

Description	Part Code
COMBI PUMP 4 FOR COMBI OVENS PUMP AS LOW AS 40MM FROM FLOOR	COMBIPUMP-4
COMBI PUMP 7 FOR COMBI OVENS PUMP AS LOW AS 70MM FROM FLOOR	COMBIPUMP-7

**European WaterCare Ltd.**

Regal House, South Road, Harlow, Essex, CM20 2BL.

Tel: 01279 780250 | Email: [info@watercare.co.uk](mailto:info@watercare.co.uk)

Visit: [www.watercare.co.uk](http://www.watercare.co.uk) | [@europeanwtrcare](https://twitter.com/europeanwtrcare)



**WATERCARE**