


commercial softeners range approximate sizes

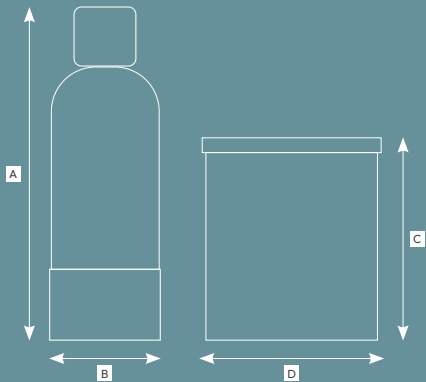

Cold Water Softeners - Installation Specifications

Water Pressure	Water Connection	Water Temperature	Electrical Supply
Minimum 1.5 bar* Maximum 5.0 bar**	¾" BSP inlet and outlet. Adequate drainage and overflow facilities required	Maximum 35°C Protect from freezing	24/240v vac 3 amps – must be on a maintained supply, i.e. never switch off

Hot Water Softeners - Installation Specifications

Automatic hot feed up to 50 degrees centigrade - For dishwasher or glasswasher, EWC valve, mounted in moulded cabinet.

Water Pressure	Water Connection	Water Temperature	Electrical Supply
Minimum 1.5 bar* Maximum 5.0 bar**	¾" To 1" dependent on unit size. Adequate drainage and overflow facilities required	Maximum 50°C Protect from freezing	24/240v vac 3 amps – must be on a maintained supply, i.e. never switch off

* Note if pressure is less than 1.5 bar watercare recommends the installation of a pumped softener

** Note if pressure exceeds 5 bar a pressure reducing valve must be fitted to keep warranty valid

Commercial Water Softeners Simplex Configuration Sizes (Duplex 2xcylinders)

Model	10	14	18	20	23	30	40	50	60	70	80	120	180	250
A (mm) - cylinder	652	779	845	982	820	1109	1338	1592	1440	1592	1592	1831	1795	2024
B (mm) - cylinder	204	204	238	204	254	254	254	254	305	331	331	356	534	610
C (mm) - brine tank	584	584	628	628	800	800	800	870	870	1060	1060	1060	1080	1080
D (mm) - brine tank	324	324	444	444	465	465	465	560	560	560	560	560	755	755
Salt (kg) per regeneration	1.5	2.4	2.8	3	3.5	4.2	5.6	7	8	9.5	10.5	16	23.5	32

Description	Part No
25KG TABLET SALT	SALT-TAB-25KG

These units are made to order.
Speak to a representative for more information. Call 01279 780250.



Simplex Configuration
For large volumes of treated water.



Duplex Configuration
For uninterrupted supply.

watercare.co.uk